


| REVISIONS | | | | |
|-----------|-----|-------------------------------|----------|-------|
| P | LTR | DESCRIPTION | DATE | APVD |
| | A | NEW RELEASE PER ECO-14-012864 | 08-27-14 | DM DM |

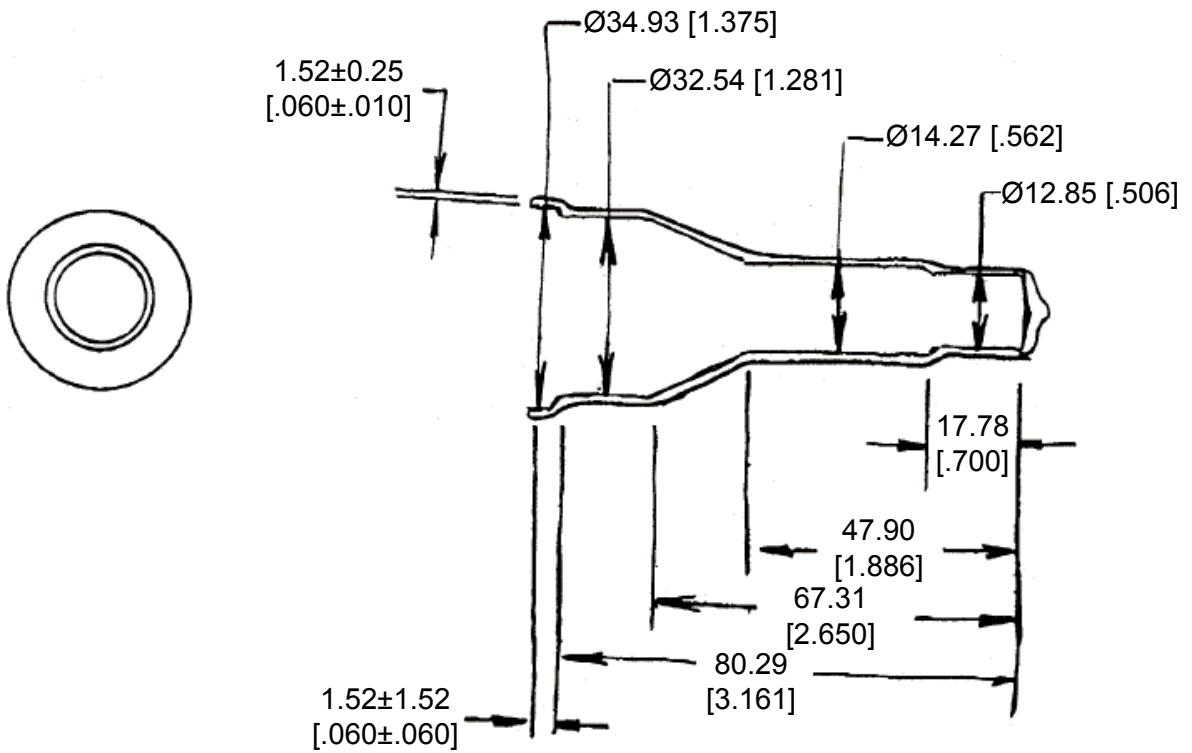

3. PART NO. HD10-9BT-BK
2. TEMPERATURE RATING: -29°C TO +100°C [-20°F TO +212°F]
1. THIS PART IS USED ON
 HD10-9-XXX RECEPTACLES
 HD14-9-XXX RECEPTACLES
 HD16-9-XXX PLUGS
 WHERE XXX IS PIN ARRANGEMENTS. SEE INDIVIDUAL CUSTOMER DRAWINGS

2014

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT 2014 BY TE CONNECTIVITY

THIS DRAWING IS UNPUBLISHED.

| | | | |
|--|-------------------------------|---------------|-----------------|
| DIMENSIONS: MM [INCH] | DWN D. MEYER 27AUG2014 | MATERIAL PVC | FINISH BLACK |
| | CHK I. GRANTCHAROVA 27AUG2014 | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | APVD D. MEYER 27AUG2014 | | |
| 0 PLC ± | PRODUCT SPEC | SIZE A 4 | CAGE CODE 4AFU8 |
| 1 PLC ± | APPLICATION SPEC | DRAWING NO | RESTRICTED TO |
| 2 PLC ± 0.63 [.025] | WEIGHT 11.00 g | © HD10-9BT-BK | - |
| 3 PLC ± | Customer Drawing | SCALE NONE | SHEET 1 OF 1 |
| 4 PLC ± | | | REV A |
| ANGLES ± 5° | | | |

