


| REVISIONS |     |                               |          |     |      |
|-----------|-----|-------------------------------|----------|-----|------|
| P         | LTR | DESCRIPTION                   | DATE     | DWN | APVD |
| A         |     | NEW RELEASE PER ECO-14-013276 | 08-27-14 | DM  | DM   |

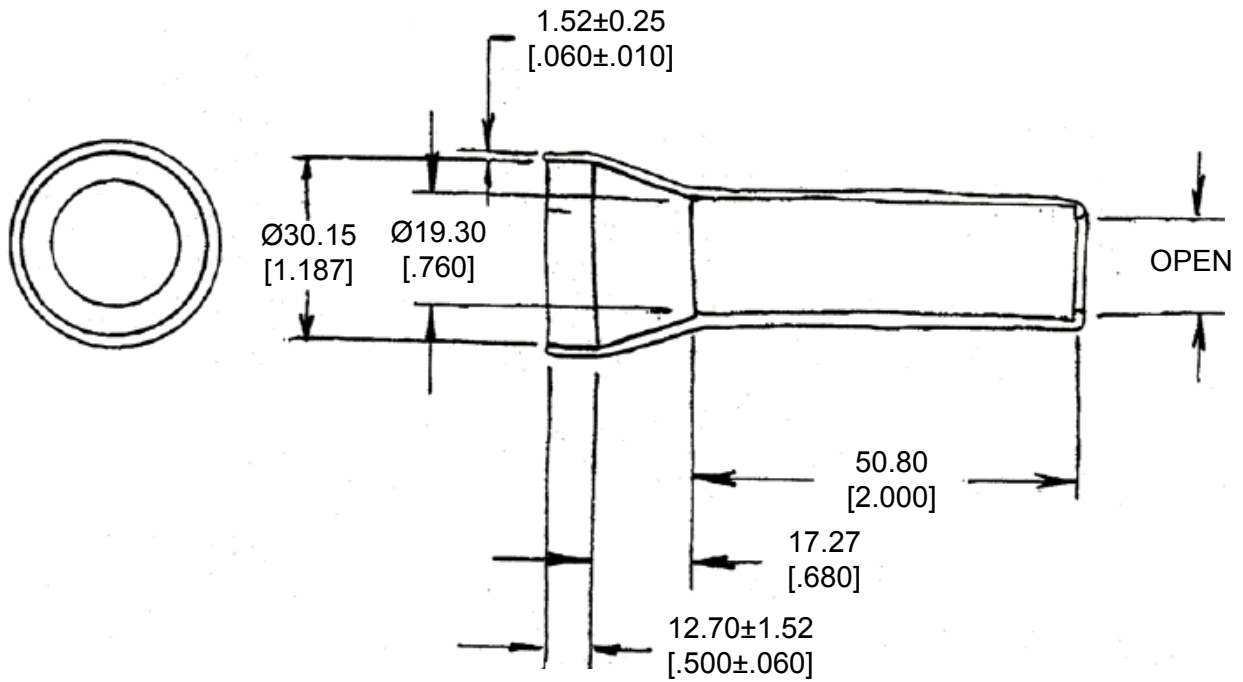

3. PART NO. HD30-18BT-BK
2. TEMPERATURE RATING: -29°C TO +100°C [-20°F TO +212°F]
1. THIS PART IS USED ON  
 HDP24-18-XXX RECEPTACLES  
 HDP26-18-XXX PLUGS  
 HD34-18-XXX RECEPTACLES  
 HD36-18-XXX PLUGS  
 WHERE XXX IS PIN ARRANGEMENTS. SEE INDIVIDUAL CUSTOMER DRAWINGS


2014

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT 2014 BY TE CONNECTIVITY

THIS DRAWING IS UNPUBLISHED.

|  |                  |                           |  |                  |        |            |               |
|--|------------------|---------------------------|--|------------------|--------|------------|---------------|
| DIMENSIONS:<br><b>MM [INCH]</b>        | DWN              | D. MEYER 27AUG2014        | MATERIAL   | PVC              | FINISH | BLACK      |               |
|  | CHK              | I. GRANTCHAROVA 27AUG2014 |  TE Connectivity |                  |        |            |               |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | APVD             | D. MEYER 27AUG2014        |  |                  |        |            |               |
| 0 PLC ±                                | PRODUCT SPEC     | NAME                      | BOOT, SIZE 18<br>HD30/HDP20 SERIES   |                  |        |            |               |
| 1 PLC ±                                | APPLICATION SPEC | SIZE                      | A 4  | CAGE CODE        | 4AFU8  | DRAWING NO | RESTRICTED TO |
| 2 PLC ± 0.63 [.025]                    | WEIGHT           | 14.00 g                   |  | C = HD30-18BT-BK |        | -          |               |
| 3 PLC ±                                | Customer Drawing |                           | SCALE  | NONE             | SHEET  | 1 OF 1     | REV           |
| 4 PLC ±                                |                  |                           |  |                  |        |            | A             |
| ANGLES ± 5°                            |                  |                           |  |                  |        |            |               |